



KMIT

COMPANY PROFILE



CEO

EXECUTIVE DIRECTOR'S SPEECH

At **KMIT Trading**, we believe that success in the trading and supply industry is built on trust, operational excellence, and an unwavering commitment to client satisfaction. From the outset, our vision has been clear to redefine how trading and supply services are delivered in Saudi Arabia by focusing on smart sourcing, transparent dealings, and sustainable partnerships.

In a sector often challenged by delays, quality concerns, and inconsistent service, **KMIT** stands out through its strict adherence to quality standards and its dedication to delivering reliable solutions that exceed client expectations. Our leadership is driven by a passion for excellence and a commitment to fostering long-term partnerships that empower business growth.

Our tagline **SUPPLY SMARTER, GROW STRONGER** is more than a slogan it's a guiding principle that shapes every decision we make, every service we provide, and every relationship we build. We understand that our role is vital to supporting industries, driving operations, and contributing to economic progress. That's why we embrace innovation, value driven service, and responsible business practices in everything we do.

INTRODUCTION

KMIT Trading is a Saudi B2B company with over four years of experience in delivering integrated trading solutions. Headquartered in the United Arab Emirates and operating across key regional and international markets, we specialize in reliable sourcing, efficient supply chain management, and proactive commercial support all tailored to meet the unique needs of today's evolving industries.



Our Vision

To be a leading business partner in Saudi Arabia and the region, recognized for delivering innovative, customer-focused trading solutions that drive sustainable growth and long-term competitiveness.



Our Mission

To provide dependable, efficient, and integrated trading services that empower businesses, enable strategic growth, and directly contribute to the success of Vision 2030 and beyond.



Core Values



QUALITY



TRANSPARENCY



COMMITMENT



INNOVATION




FLEXIBILITY



PARTNERSHIP

COUNTRIES WE COVER

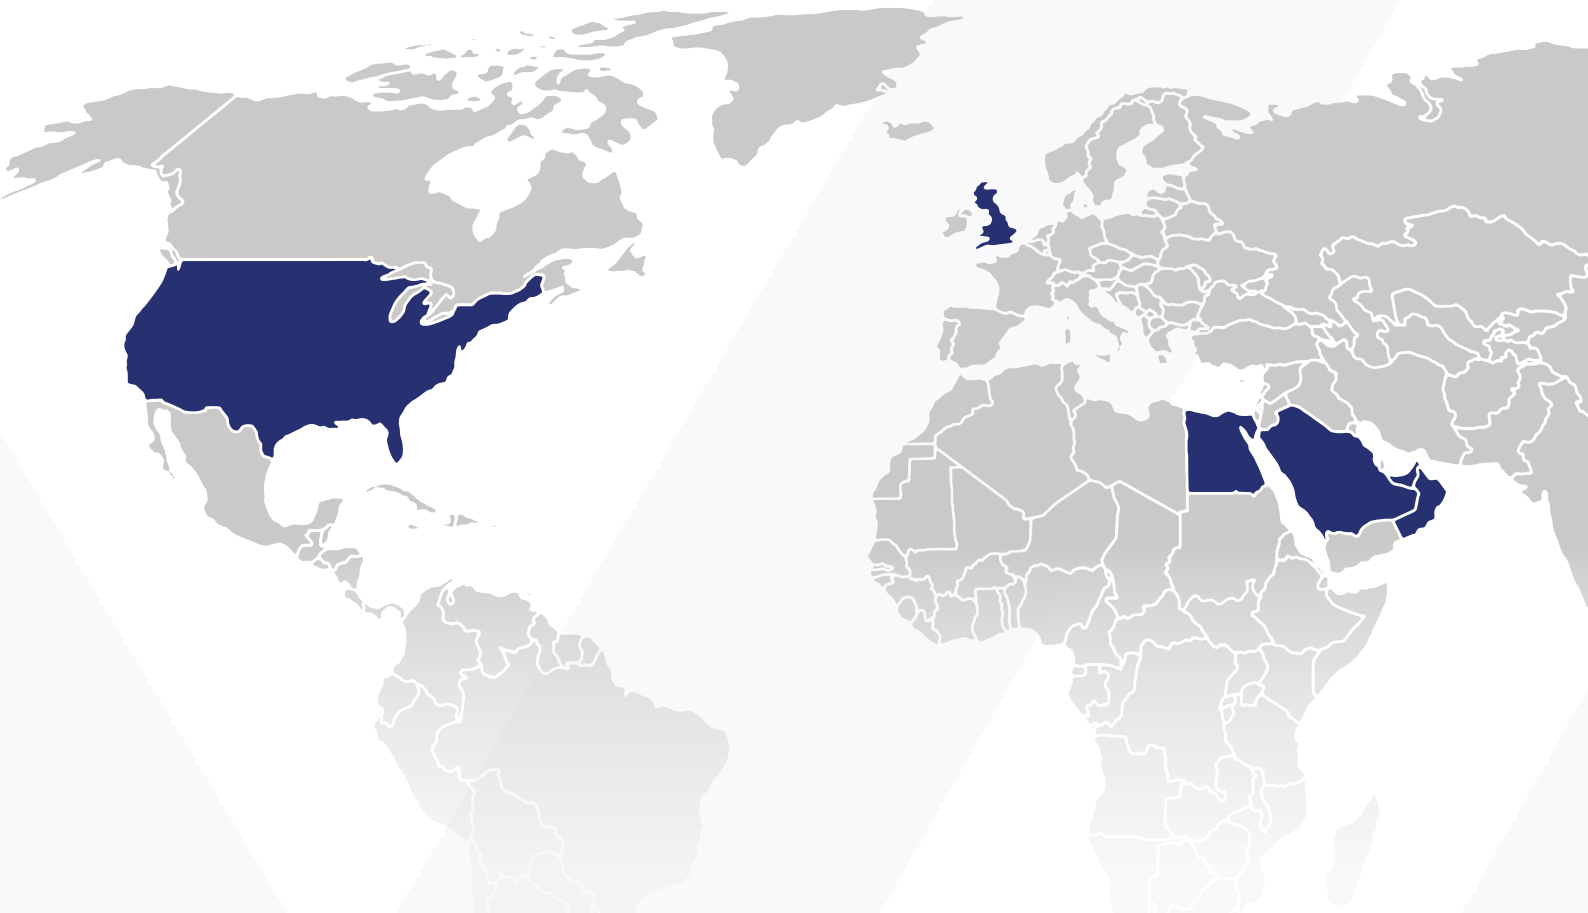

At **KMIT Trading**, we proudly serve a diverse range of markets, building trusted business relationships across key regions. Each country we cover plays a unique role in our trading network:



UAE

Our headquarters and regional base for strategic operations and international trade.



Saudi Arabia

A core market where we support diverse industries with tailored supply solutions.



Oman

Focused on efficient sourcing and delivery for growing industrial needs.



Egypt

Providing reliable trading services for the infrastructure and commercial sectors.



United Kingdom

Partnering with trusted suppliers to source high quality products.



United States


A key source of advanced materials and innovative trade solutions.

Wherever business takes you, **KMIT Trading** is there to deliver.

With a strong presence across key global markets, we make sure that every product, partnership, and process reflects our commitment to quality and consistency.

From the GCC to Europe and North America, we understand the unique needs of each market and we adapt our services to meet them with efficiency and integrity.

No matter the distance, our clients know they can rely on **KMIT** for dependable supply, smart solutions, and a seamless trading experience.



ROOMS 101 - 105
< FRONT

PRODUCTS AND SOLUTIONS



Pingger

OUR ADVANTAGES



Antibacterial & Strongly
anti-mildew



Fire retardant



Chemical resistance
& strong corrosion resistance



Anti-collision &
wear-resistant



No benzene, no heavy metal,
can be recycled and used



Non Formaldehyde
& green environment



The surface of wall
panel is easy to clean



Not easy to fade,
not easy aging



Color is rich



Size stability



Easy to install &
no noise



Light weight

The panel meets the following specification requirements

1. **Antibacterial** – JIS Z 2801:2010 [Japanese standard] Antibacterial rate >99.90%
2. **Mold proof** – ASTM G21-15 [American Standard] **Grade 0 does not grow**
3. **Anti pollution** – EN 423:2001 [European Standard] **Grade A** (unaffected)
4. **Fireproof and flame retardant** – ASTM E84-17 [American Standard] / GB 8624-2012 [National Standard] **Class A**
5. **Horizontal Combustion** – UL 94 HB [American Standard] **Good**
6. **Anti-collision performance** – ASTM D256-10e1 [American Standard] / GB/T 14153-1993 [National Standard] **Good**
7. **Chemical resistance and corrosion resistance** – ASTM D543-14 / ASTM D2240-15 / ASTM D638-14 [American Standard] **Good**
8. **TVOC toxic and harmful gas volatilization** – CA CDPH 01350 [American Standard] / ISO 16000-3/6/9/11 [European Standard] **Not detected**
9. **Color difference** – SAE J1545-2005 [American Standard] **No significant** color difference
10. **Heavy metal** – California Proposition 65 [American Standard] **Not detected**
11. **Formaldehyde** – CA CDPH 01350 [American Standard] / GB/T 18580-2017 [National Standard] **Not detected**



Wall panels System



Product Description:

It's antibacterial, effectively curbing bacterial growth to prevent infections.

Fireproof for safety, green, and 100% recyclable. With crash proof and waterproof features, plus a clean, easy to clean surface, it resists mould and germs, ensuring long lasting use.

Standard sheet size:



Solid color: 1.22m x 2.44m - 1.22m x 2.8m



Wooden color : 1.18m x 2.44m - 1.18m x 2.8m



Thickness: 0.8mm - 1.0mm - 1.5mm - 2.0mm - 2.5mm - 3mm

Key Features:



Customizable



Antimicrobial



Eco-Friendly




Durable




Fire Safety




Easy Install



1932D
Coarse texture




1930D
Coarse texture




1931D
Coarse texture



1866D
Coarse texture



1709D
Coarse texture



1862D
Coarse texture



2012D
Coarse texture



1029D
Coarse texture



1886D
Coarse texture




1880D
Coarse texture




1027D
Coarse texture




9240B
Wave effect



1886B
Wave effect



1712B
Wave effect



1862B
Wave effect



Handrails System



Product Description:

Pinger handrail installed on the wall which is about 0cm ~ 15cm or 80cm ~ 90cm from floor. Wall Guards can protect the walls well from impact.

Handrail is composited by the following parts: 2mm vinyl grip cover, 2mm vinyl bumper cover, 2mm thickness grip aluminum retainer, 2mm thickness bumper aluminum retainer, ABS elbow, stainless steel bracket, ABS outside corner.



HRS2001

Stainless Steel Grip + Vinyl Covered + Aluminum
Handrail 200mm Height, 5m Length
stainless steel grip: 3m, vinyl cover bumper 5m
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HRS2002

Stainless Steel Grip + Vinyl Cover + Aluminum
Handrail with 60mm height wood color strip 200mm Height, 5m Length
stainless steel grip: 3m, vinyl cover bumper 5m
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HRS2003

Stainless Steel Grip + Vinyl Cover + Aluminum
Handrail with 127mm height, wood color bumper 200mm Height, 5m Length
stainless steel grip: 3m, vinyl cover bumper 5m
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall




HR2001

Vinyl + Aluminum Handrail
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HR2002

Vinyl + Aluminum Handrail with 60mm
height wood color strip
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HR2003

Vinyl + Aluminum Handrail with 127mm
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall




HR2004

Aluminum Handrail with 38mm height
wood color grip
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HR2005

Vinyl + Aluminum Handrail with 36mm
height, wood color grip, and 60mm
height wood color bumper
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HR2006

Vinyl + Aluminum Handrail with 38mm
height, wood color grip, and 127mm
height wood color bumper
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



HR2007

Vinyl + Aluminum Handrail
200mm Height, 5m Length
Dia. of grip: 38mm
Dia. of vinyl cover: 127mm
38mm distance from the wall



Corner Guards System



Product Description:

Protect high impact wall edges with this durable corner guard system, designed for long term use. Made from resilient materials to resist impact, scratches, and daily wear. Ideal for hospitals, schools, and commercial buildings with frequent foot traffic. Easy to install and available in various colors to match any interior design.



CGS38

304 stainless steel Angle guard,
Satin finish and brushed finish
38mm x 38mm Width
90degree




CGS50

304 stainless steel Angle guard,
Satin finish and brushed finish
50mm x 50mm Width
90degree



CGS61

304 stainless steel Angle guard,
Satin finish and brushed finish
61mm x 61mm Width
90degree



CGS98

304 stainless steel Angle guard,
Satin finish and brushed finish
89mm x 89mm Width
90degree



CG20

Vinyl Corner Guards
20mm x 20mm Width
90 degree



CG20W

Vinyl Corner Guards in Wood Color
20mm x 20mm Width
90 degree



CG40

Vinyl Corner Guards
38mm x 38mm Width
90 degree



CG40W

Vinyl Corner Guards in Wood Color
38mm x 38mm Width
90 degree



CG511

Vinyl + Aluminum Corner Guards
51mm x 51mm Width
90 degree



CG511W

Vinyl + Aluminum Corner Guards in
Wood Color
51mm x 51mm Width
90 Degree



CG61

Vinyl Corner Guards
61mm x 61mm Width
90 degree



CG61W

Vinyl Corner Guards in Wood Color
61mm x 61mm Width
90 degree



CG76

Vinyl & Aluminum Corner Guards
76mm x 76mm Width
90 degree



CGA50

Aluminum Corner Guard
50mm x 50mm Width
90 degree



Wall Guards System



Product Description:

The Pinger antibacterial wall guard features a vinyl surface infused with antimicrobial agents that inhibit over 99.9% of bacteria and mold growth. It offers superior wall protection with a heavy-duty aluminum core and meets strict international fire safety standards. Environmentally friendly and free from harmful substances, it is ideal for hospitals, schools, and high-traffic public spaces.



WG1271R

Vinyl Cover + Vinyl Cover Retainer
+Aluminum

Wall Guards in single color
127mm Height, 5m Length



WG1272R

Vinyl Cover + Vinyl Cover Retainer
+Aluminum
Wall Guards with 60mm height wood
color strip
127mm Height, 5m Length




WG1273R

Vinyl Cover + Vinyl Cover Retainer
+Aluminum
Wall Guards in single wood color
127 mm Height, 5m Length



WG1021

Vinyl & Aluminum Wall Guards
in single color
102mm Height, 5m Length

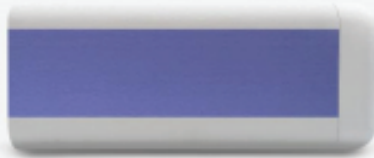

WG1022

Vinyl & Aluminum Wall Guards with
60mm height color strip
102mm Height, 5m Length



WG103

Vinyl & Aluminum Wall Guards
in single color
102mm Height, 5m Length



WG1021W

Vinyl & Aluminum Wall Guards
in single wood color
102mm Height, 5m Length




WG1022W

Vinyl & Aluminum Wall Guards with
60mm height wood color strip
102mm Height, 5m Length



WG103W

Vinyl & Aluminum Wall Guards
in single wood color
102mm Height, 5m Length

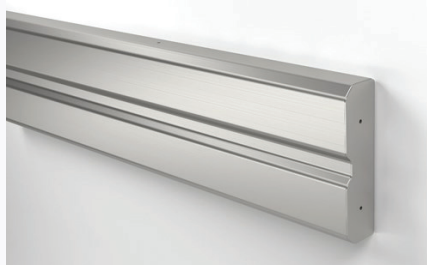

WGSS140

Materials : Stainless Steel
Standard Length : 5m
Standard Width: 140mm
Thickness of Stainless Steel : 2mm



Bathroom Safety Grab Bar System



Product Description:

Pinger's Bathroom Safety Grab Bar System includes a variety of grab-bar designs (straight, L-shaped, U-shaped, fold-up) constructed from 4mm thick nylon tubing over a 1.5mm aluminum core, with a total outside diameter of approximately 35mm. Sizes range from around 300mm to 1000mm or tailored to custom requirements.



GB001

Straight Nylon & Aluminum Grab Bar with satin surface.
Dia. of Nylon is 35mm.
Standard Length:
300mm, 450mm, 600mm, 750mm.
and we can make the length as your request.



GB001D

Straight Nylon & Aluminum Grab Bar with skid proof surface.
Dia. of Nylon is 35mm.
Standard Length:
300mm, 450mm, 600mm, 750mm.
and we can make the length as your request.



GB007

Nylon Lift-up Grab Bar.
Dia. of Nylon is 35mm.
Length is 600mm and we can make the length as your request
304 stainless steel plate size is 200mm X 115mm.



GB07B

Nylon Lift-up Grab Bar.
Dia. of Nylon is 35mm.
Length is 600mm and we can make the length as your request.



GB007D

Nylon Lift-up Grab Bar.
Dia. of Nylon is 35mm.
Length is 600mm and we can make the length as your request.



GB004

Nylon Grab Bar in 135 degree "L" shape.
Dia. of Nylon is 35mm. Both of Height & Width is 450mm



GB002

Nylon Grab Bar in "L" shape.
Dia. of Nylon is 35mm.
Height is 720mm.
Width is 500mm.



GB011

Nylon Floor to Wall support Grab Bar.
Dia. of Nylon is 35mm.
Height is 750mm.
Width is 700mm.



GB018

Nylon Shower Seat.
Dia. of Nylon is 35mm.
Height is 450mm.
Length is 380mm.
Width is 530mm.



GB023

Multifunction Shower Seat.
Dia. of Nylon is 35mm.
Length is 580mm.
Width is 380mm.
Height is 660mm.



Barrier - Free Access

Standard Thickness: Nylon: 4mm
Aluminum Tube: 2mm
Standard size: customized according to customer needs



Chair Rails System



Product Description:

Pinger's Chair Rails System offers a durable and decorative solution for protecting walls from abrasions caused by chairs, trolleys, and other moving objects—perfect for high-traffic areas. It also functions as a stylish visual divider, enhancing interior design by separating different wall treatments (e.g., contrasting colors or materials).

Available in various heights—46mm (CH46), 60mm, and 76mm (CH76)—each rail features a vinyl cover and an aluminum core for lasting strength and impact resistance.

Key benefits include:

- Antibacterial, fire-retardant, and scratch-resistant surface with anti-slip fine texture that's easy to clean.
- Constructed with 2mm-thick vinyl and oxidized 6063-T5 aluminum, ensuring no rust and long-term performance.
- Includes full installation accessories (screws and ABS end caps). Offers extensive color and wood-grain options—hundreds of finishes available, with custom choices supported.
- Meets rigorous safety standards, including antibacterial/mold resistance (ASTM G21-15), fire/smoke ratings (ASTME84-17, GB8624-2012), horizontal burning (UL94 HB), chemical/corrosion resistance, low VOC emissions, and strict tests for phthalates, formaldehyde, and heavy metals.

Ideal for environments like hospitals, nursing homes, hotels, schools, restaurants, and public facilities, it blends protection, cleanliness, and design seamlessly.



CH46

Vinyl & Aluminum

Thickness of vinyl cover: 0.045" (1.5mm)

Thickness of aluminum r: 0.03" (1.0mm)

Total Thickness: 0.045" (1.5mm)

Total Height: 1.38" (46mm)



CH76

Vinyl & Aluminum

Thickness of vinyl cover: 0.07" (1.8mm)

Thickness of aluminum r: 0.03" (1.0mm)

Total Thickness: 1" (25mm)

Total Height: 3" (76mm)

Wall Base System




Product Description:

Pinger Wall Base Systems protect walls from impact and scratches using either high-impact vinyl reinforced with aluminum or full aluminum construction. They feature an antibacterial, fire-retardant, easy-to-clean surface, free from harmful substances, and come in a wide range of colors and wood finishes. Ideal for hospitals, schools, hotels, and high-traffic areas, they combine durability with a modern, stylish appearance.




WBA-KF60

Aluminum / PVC / LED lights
Thickness of aluminum: 2mm
Thickness PVC retainer: 2mm
Total height: 40mm / 60mm / 100mm



WBA40

Aluminum
Thickness of aluminum: 2mm
Total Height: 40mm / 60mm / 100mm



WBA-F80

Aluminum / LED lights
Thickness of aluminum: 2mm
Total height: 80mm



WB100

Vinyl & Aliminium
 Thickness of vinyl cover: 0.08" (2mm),
 Thickness of aluminum: 0.06" (1.5mm)
 Total thickness: 3/8" (9.5mm)
 Total height: 4" (100mm)



WB100W

Vinyl & Aliminium
 Thickness of vinyl cover: 0.08" (2mm),
 Thickness of aluminum: 0.06" (1.5mm)
 Total thickness: 3/8" (9.5mm)
 Total height: 4" (100mm)



SK10

Vinyl & PVC
 Thickness: 10mm
 Width: 100mm
 Length: 3m/pc



SK3

Vinyl & PVC
 Thickness: 2mm
 Width: 100.7mm



SK2

Vinyl & PVC
 Thickness: 2mm
 Width: 100.7mm



SK3

Vinyl & PVC
 Thickness: 2mm
 Width: 80.7mm



Rub Rails Sheet



Product Description:

The Pinger Rub Rails Sheet is a high-performance wall protection solution, specially designed to shield walls, doors, and corners from daily wear, abrasion, and impact damage in busy environments. Manufactured from premium antimicrobial resin materials, it offers outstanding antibacterial performance, helping inhibit the growth of harmful microorganisms for a cleaner and healthier environment.

Its robust composition provides anti-collision and anti-friction capabilities, making it highly resistant to scratches, dents, and surface wear caused by trolleys, carts, luggage, and frequent human traffic. The sheet is also resistant to chemical corrosion, ensuring it maintains its quality and appearance even when exposed to cleaning agents or disinfectants. Its anti-pollution properties mean it resists staining and dirt build-up, while the smooth surface makes it easy to clean and maintain.

As part of Pinger's commitment to sustainability, the Rub Rails Sheet is eco-friendly, green-certified, and fully recyclable, supporting green building practices without compromising durability or hygiene.

Aesthetic flexibility is provided through a wide range of colors and finishes, with two distinctive surface options available: Coarse Lines (Q) for a bold, textured look and Ultra-Fine Lines (C) for a more refined appearance. This allows designers and facility managers to choose the most suitable style for their interiors.

Installation is quick and reliable—the sheet is applied directly to the wall using epoxy glue, ensuring strong adhesion, a clean finish, and long-term performance. This method avoids visible fasteners, maintaining a sleek, continuous appearance.

Engineered to meet strict international safety and environmental standards, the Pinger Rub Rails Sheet is ideal for use in hospitals, healthcare centers, schools, hotels, airports, transportation hubs, restaurants, and public facilities, where wall protection, hygiene, and aesthetics are equally important.



WP102



WP152



WP200



WP300




Floor System




Product Description:

Pinger provides a comprehensive selection of commercial-grade flooring systems, tailored for high-traffic and demanding environments:

- Interweave Carpet – Durable, modular carpet tiles with eco-friendly backing.
- Homogeneous Vinyl Flooring – Continuous, same-material-throughout vinyl sheets (~2mm thick) known for their hygienic surface, ease of cleaning, and broad compatibility with healthcare, education, and hospitality environments.
- Heterogeneous Vinyl Flooring – Multilayer vinyl options offering decorative faces with resilient backing, though specific details were not highlighted in accessible sources.
- LVT Tile Flooring (Luxury Vinyl Tile) – PVC-based tiles featuring decorative printed film and flexible design. Waterproof, non-flammable, compatible with floor heating, and designed for easy cleaning—ideal for airports, schools, malls, and stations.
- SPC Hard Lock Floor (Stone Plastic Composite) – Highly stable, rigid flooring with exceptional scratch and water resistance. Features excellent dimensional stability and wear resistance and supports floor heating. Lifespan up to 20 years, suitable for transit hubs and healthcare facilities.
- Rubber Floor Covering – PVC-free, seamless rubber flooring offering anti-slip performance (R9), high flame retardancy, sound absorption, and superior loading capacity. Eco-friendly and ideal for critical infrastructure spaces such as airports and transit centers.




2075
HOM GRACEFUL

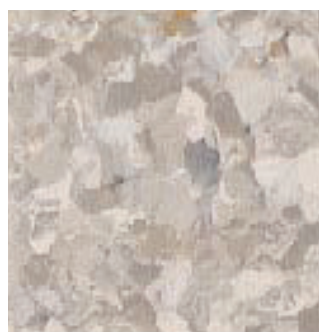


2057
HOM GRACEFUL




2060
HOM GRACEFUL



2059
HOM GRACEFUL



2080
HOM GRACEFUL




2074
HOM GRACEFUL




2072
HOM GRACEFUL




2071
HOM GRACEFUL




TJ-7914
HOM MARIA




TJ-7932
HOM MARIA




TJ-7915
HOM MARIA



TJ-7912
HOM MARIA



TJ-7917
HOM MARIA



TJ-7920
HOM MARIA



TJ-7923
HOM MARIA




TJ-7928
HOM MARIA

SPC




KP-SPC-401607
SPC SENER



KP-SPC-401608
SPC SENER



KP-SPC-401605
SPC SENER




KP-SPC-401606
SPC SENER




KP-SPC-401501
SPC SENER



KP-SPC-401504
SPC SENER



KP-SPC-401507
SPC SENER




KP-SPC-401505
SPC SENER


LVT



KAG-LVT-200909
LVT KINGSON



KAG-LVT-200910
LVT KINGSON



KAG-LVT-200911
LVT KINGSON



KAG-LVT-200912
LVT KINGSON




KAG-LVT-203308
LVT KINGSON



KAG-LVT-203309
LVT KINGSON




KAG-LVT-200913
LVT KINGSON




KAG-LVT-200914
LVT KINGSON


RUBBER




R30-025
RUBBER KALIN




R30-026
RUBBER KALIN




R30-027
RUBBER KALIN




R30-028
RUBBER KALIN




R30-017
RUBBER KALIN



R30-018
RUBBER KALIN




R30-019
RUBBER KALIN




R30-020
RUBBER KALIN


HET




JL01-22
HET




JL01-23
HET




JL01-24
HET




JL01-25
HET




JL01-32
HET



JL01-33
HET



JL01-26
HET



JL01-16
HET



Medical Curtain



Product Description:

Pinger's Medical Curtain System is designed to enhance both privacy and hygiene in healthcare and similar environments, and includes:

- **Curtain Fabric**

High-quality 100% polyester curtains, about 0.6mm thick and approximately 2.8m in height, available in 9 colors. These curtains are resilient, tear-resistant, and engineered for durability in high-use areas. They feature mesh ventilation at the top to maintain airflow while ensuring patient privacy.

- **Hygiene & Safety Features**

The fabric offers antibacterial properties (up to 99% effectiveness), excellent stain resistance, strong tearing strength, and superior color fastness to washing, rubbing, and perspiration. Additionally, it is flame-retardant and contains no formaldehyde or unpleasant odors.

- **Curtain Tracks**


Available in aluminum alloy designs—including the bendable I-shaped track (Model CT01, 6m) and other customizable options (such as CT3129, CT3130, CT2624) designed for smooth curtain movement. These systems can support up to 10kg per bead and adapt to various room layouts, including turning corners.

- **Green & Customizable**

The system emphasizes eco-conscious design, with curtains certified free of toxic emissions and heavy metals. Custom sizing, colors, and track configurations are available to meet diverse aesthetic and functional needs.



CT-98

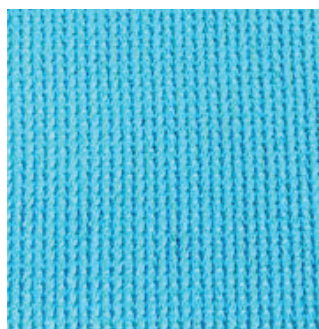


CT-88



CT-64



CT-63




CT-67



CT-91



CT-76



CT-80



CT-65



CT-69



CT-70



CT-75



CT-77



CT-94



CT-59



CT-54



Hospital Door



Product Description:

The Pinger Door System delivers healthcare-grade solutions—from warm, decorative wooden patient room doors to hygienic, glass-enhanced and high-traffic models—all customizable, eco-friendly, and compatible with protective hardware.



Pinger wood color door frame
Design,Material and Size as your offer .



Pinger staineless steel door frame
Design,Material and Size as your offer .



Structure specification ☑

- POLY WOOD OR SOLID WOOD
- DURABLE MDF
- Pinger Durable rigid vinyl wall sheet



Heavy Duty wall Protection



Product Description:

Pinger's Heavy-Duty Wall Protection series—featuring anti-impact guards, crash rails, and rubber protectors—is designed to deliver superior impact resistance in demanding environments while maintaining customizable, eco-friendly aesthetics.




BS110

Length: 3000mm
Width: 110mm
Height: 31mm
Weight: 1.64kg/m



BS110

Length: 3000mm
Width: 110mm
Height: 31mm
Weight: 1.64kg/m

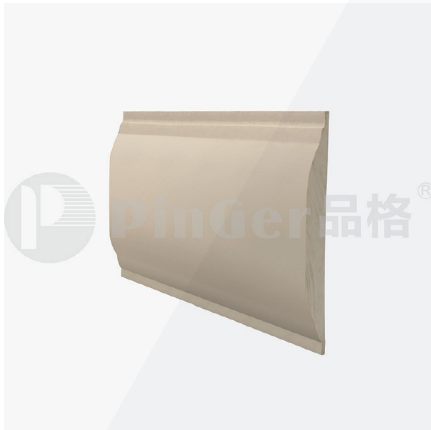

CH1016

Resin panel
Resin panel thickness: 10mm
Resin panel width: 10.16cm
Length: 5m / piece



Traffic & Safety



Product Description:

Pinger offers a complete range of traffic calming, parking safety, and structural protection solutions designed for roads, parking facilities, industrial sites, and public areas. Their Speed Humps and Bumps come in multiple sizes, profiles, and modular designs, made from durable rubber with anti-slip patterns and high-visibility markings to ensure year-round performance in all weather conditions. Options range from low-profile mini bumps to long-span modular humps, with both permanent bolt-down and portable foldable models for temporary use.

For pedestrian safety, Pinger produces Rubber Pedestrian Crossings and Speed Cushions. These systems are engineered for high durability, with anti-skid surfaces, reflective markings for night visibility, and modular sections for flexible installation. Speed cushions are designed to slow standard vehicles while allowing wider emergency vehicles to pass without obstruction.




RS420

Key Features: High visibility black/yellow, bolt-on installation.

Applications: Traffic calming in high-risk zones.

Middle Size: 500×420×50mm

End Cap Size: 250×42×50mm

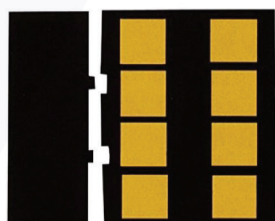

RS600

Key Features: Interlocking panels, high load capacity.

Applications: Wide crossings, heavy vehicle zones.

Middle Size: 500×600×30mm

End Cap Size: 270×42×50mm



RSM-1

Key Features: Compact, low-profile, reflective.

Applications: Light traffic areas, parking control.

Size: 340×340×60mm



RPC-B

Key Features: Anti-slip, modular zebra crossing tiles.

Applications: Pedestrian safety.

Size: 500×500×75mm



RPC-S2

Key Features: Anti-slip, modular zebra crossing tiles.

Applications: Pedestrian safety.

Size: 500×500×75mm




RPC-C

Key Features: Anti-slip, modular zebra crossing tiles.

Applications: Pedestrian safety.

Size: 500×500×75mm

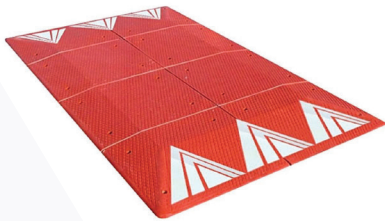

SC3000

Key Features: Modular, reflective markings, flexible.

Applications: Bus/taxi-friendly speed calming.

Size: Sets from 1500–3000 width



RS250P

Key Features: Foldable, transportable.

Applications: Temporary or emergency use.

Size: 3000×250×30mm



RSB-1 Y/B

Key Features: Visual/audible alert, reflective.

Applications: Lane marking, hazard alerts.

Size: 1000×100×15 to 400×135×107mm



WL1650B

Key Features: Reflective inserts, durable.

Applications: Parking bay safety.

Size: 550×150×90 to 1830×150×100mm



RQ818

Key Features: Impact absorption, reflective strips.

Applications: Protects corners in car parks / warehouses.

Size: 800–1000mm length



WG-15

Key Features: Chevron design, wall-mounted.

Applications: Indoor/outdoor wall protection.

Size: 1000×150mm / 800×220mm

KVIT

Lighting

GLOBAL STANDARDS

1. Quality Management & Certifications

We maintain a robust quality assurance system, backed by internationally recognized standards:

- **ISO 9001** Quality Management System ensures consistent product reliability and manufacturing excellence.
- **ISO 14001** Environmental Management System reflects their commitment to sustainable operations.
- Product certifications include **TÜV-listed CE, CB, RoHS, and SAA**, ensuring compliance across European, Asian, and global safety and environmental standards.

These certifications demonstrate our commitment to providing safe, high-quality lighting that meets global regulatory standards.

2. Product Testing

We enforce a rigorous in-house quality control process covering every production stage:

- Incoming materials are thoroughly inspected, followed by strict **in-line quality checks, aging tests, and final product inspections** to ensure performance and durability.
- Lighting panels feature enhanced safety validation, including **650°C glow-wire tests** for fire resistance, **UGR<19** (unified glare rating) for reduced glare, **IP54/IP65** ratings for protection against dust and moisture, and **IK ratings** for mechanical robustness in demanding environments (e.g., hospitals, cleanrooms).

3. Innovation & Certification-Readiness

We invest in continuous R&D while maintaining industry-standard certifications:

- Offers a wide array of LED lighting technologies—from classic and backlit UGR<19 panels to IP-rated, narrow-frame, RGBW, CCT-adjustable, lens-integrated, pendant, and 3D frameless panels. Recently developed lines include **UVC LED panels, home surface-mount models, and trunk linear systems**.
- Holds **design patents (10+)** and offers flexible **OEM/ODM services**, enabling customized solutions for diverse regions and markets.

4. Market Reach & Global Compliance

We reach across major markets, backed by relevant certifications and flexible supply models:

- Products are recognized in **Europe, Germany, France, Singapore, South Africa**, and other regions—reflecting robust international acceptance.
- Compliance with CE, RoHS, CB, SAA, and TÜV certifications demonstrates readiness for diverse regulatory environments.



W
White

LENS LED Panel Series

- Lens Panel is not only a panel, it could also be wall washer!
- Revolutionary LENS design to offer 140lm/W high efficiency lighting output;
- No LGP inside, most reliable panels, 5 years warranty;
- Lower glare UGR<19;
- Different beam angle from 60°, 90°, asymmetric 25° to double asymmetric 25°;
- Zigbee driver optional;
- Bluetooth and Wifi control supported by Tuya;
- Panel with air slots available;

Accessories







Suspension kits



Recessed clips



Surfacemount frame





Specification


Name	Model.No.	Size	Wattage	Luminous flux	Efficiency	UGR	Beam angle	CCT
140lm/W LENS LED Panel	DWL606030H	595x595x21.6mm	30W	4200lm	140lm/W	<19@90° <16@60°	90°/60°/25°	3000K/ 4000K/ 5700K
	DWL626230H	620x620x21.6mm	30W	4200lm	140lm/W	<19@90° <16@60°	90°/60°/25°	
	DWL3012030H	295x1195x21.6mm	30W	4200lm	140lm/W	<19@90° <16@60°	90°/60°/25°	
120lm/W LENS LED Panel	DWL606030	595x595x21.6mm	30W	3600lm	120lm/W	<19@90° <16@60°	90°/60°/25°	3000K/ 4000K/ 5700K
	DWL626230	620x620x21.6mm	30W	3600lm	120lm/W	<19@90° <16@60°	90°/60°/25°	
	DWL3012030	295x1195x21.6mm	30W	3600lm	120lm/W	<19@90° <16@60°	90°/60°/25°	

* If 60/25 degree, efficiency will be around 10% lower.






Seamless Corner



2835 LED



Metal backplate

W
White

IP65 Backlite Panel Series

- IP65 Panel could be used in the clean room factory, clear room, restaurant and swimming pool to keep water proof and dustproof;
- LM80 LED, PS diffuser, Metal Plate used to keep high quality products;
- PMMA Opticla LENDS;
- 3/5 years warranty;
- RA90 and RA80 optional ;
- CCT selected
- SDCM<6;
- IP65 means, panel from sides + panel back sides+ driver IP65;
- IP44 means panel front side is IP44. Driver and panel back sides are IP65;

IP65 TUV Test Report



Accessories



Suspension kits



Recessed clips




Surfacemount frame



Specification


Name	Model.No.	Size	Efficiency	Wattage	Luminous flux	IP Rated	UGR	CCT
Opal Diffuser Backlite Panel	DWB(IPV)606036(30B)	595x595x30mm	100lm/W, 120lm/W	36W/30W	3600lm	IP44/IP65	22	3000K 4000K 5700K
	DWB(IPV)606040B	595x595x30mm	125lm/W	40W	5000lm	IP44/IP65	22	
	DWB(IPV)626236(30B)	620x620x30mm	100lm/W, 120lm/W	36W/30W	3600lm	IP44/IP65	22	
	DWB(IPV)3012036(30B)	295x1195x30mm	100lm/W, 120lm/W	36W/30W	3600lm	IP44/IP65	22	
	DWB(IPV)6012060(48B)	595x1195x30mm	100lm/W, 120lm/W	60W/48W	6000lm/ 5760lm	IP44/IP65	22	

* DWB606036CCT : this is for CCT selected version If RA90, the efficiency will be relatively lower.





Seamless Corner



Metal backplate



W
White

HCL LED Panel Light

- Smart panel with  **zigbee** driver optional or Bluetooth and Wifi control  (Tuya);
- CCT Tunable;
- No LGP inside, no yellowing;
- Uniform light distribution;
- Slim thickness 30mm;
- 110lm/W or 140lm/W;
- UGR<19 optional;
- 3/5 years warranty;
- RA80 or RA90;
- CCT selected;
- SDCM<6, SDCM<3 optional;

Accessories



Suspension kits




Recessed clips



Surfacemount frame

light intensity

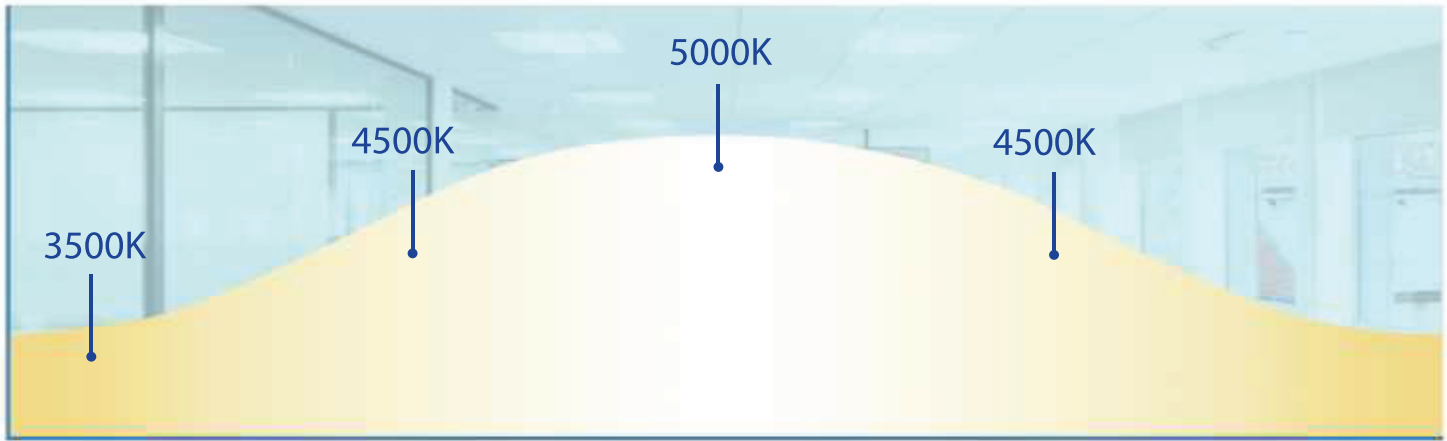

Specification


110lm/W Backlite Smart HCL Panel

Model.No.	Efficiency	LED Power	Luminous flux	Dimension	Diffuser	CCT	CRI	UGR	Remark
DWBUGR606030 CCT	110lm/W	30W	3400lm	595x595x30mm	Micro prismatic	3000K-5700k CCT tunable	>80	UGR< 19	Support Zigbee Bluetooth Wifi control

140lm/W Backlite Smart HCL Panel

Model.No.	Efficiency	LED Power	Luminous flux	Dimension	module	CCT	CRI	UGR	Remark
DWBUGR606028 CCT	140lm/W	28W	3920lm	595x595x30mm	Micro prismatic	3000K-5700k CCT tunable	>80	UGR< 19	Support Zigbee Bluetooth Wifi control


Remark: Other Specs for LED Panel is available.






Sensor Backlite Panel Series

- Built-in sensor or external sensor system;
- On/off sensor: Microwave sensor, PIR sensor Optional;
- Day light harvesting sensor: Domestic Microwave sensor, and , PIR sensor optional;
- Wireless network sensor is optional;
- More than 15PCS M/S sensor controlled Panels within 30m solution through 1-10V driver is available;

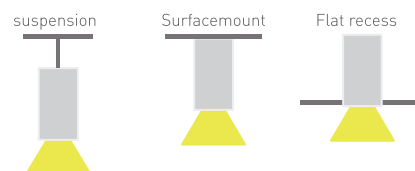

ON/OFF Sensor



PIR Sensor

- PIR sensor + ON/OFF driver
- PIR sensor + 0-10V driver
- PIR sensor + DALI driver

Daylight harvesting Sensor



Daylight Harvest Sensor

- PIR sensor + DALI driver
- PIR sensor + Bluetooth + APP




Specification


100-140 lm/W Opal Diffuser Edge light Panel

Name	Model.No.	Size	Wattage	Luminous flux	Efficiency	UGR	Beam angle	CCT
100-140 lm/W Sensor Opal Diffuser Panel	DWS606036/30B/26H	595x595x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	22	110°	3000K/ 4000K/ 5700K
	DWS606040B/36H	595x595x10mm	40W	5000lm	125lm/W 140lm/W	22	110°	
	DWS626236/30B/26H	620x620x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	22	110°	
	DWS3012036/30B/26H	295x1195x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	22	110°	
	DWS601206/48B/42H	595x1195x10mm	60W 48W 42W	6000lm 5760lm 5880lm	100lm/W 120lm/W 140lm/W	22	110°	

100-140 lm/W UGR<19 Edge light Panel

Name	Model.No.	Size	Wattage	Luminous flux	Efficiency	UGR	Beam angle	CCT
100-140 lm/W Sensor UGR Panel	DWSUGR606026H	595x595x10mm	26W	3000lm	115lm/W	<17	90°	3000K/ 4000K/ 5700K
	DWSUGR606036/30B/26H	595x595x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	<19	90°	
	DWSUGR606040B/36H	595x595x10mm	40W	5000lm	125lm/W 140lm/W	<19	90°	
	DWSUGR626236/30B/26H	620x620x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	<19	90°	
	DWSUGR3012036/30B/26H	295x1195x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	<19	90°	
	DWSUGR601206/48B/42H	595x1195x10mm	60W 48W 42W	6000lm 5760lm 5880lm	100lm/W 120lm/W 140lm/W	<19	90°	





Aluminium Back plate

W
White

IP65 LED Edge Light Panel

- Front face+backside+driver, whole fixture IP65, totally Waterproof and dust proof;
- PS diffuser, glow wire test 650°C;
PC diffuser, glow wire test 850°C; 5 years warranty;
- Special used in the factory, clean room, pharmaceutical factory, hospital operating room;
- IP54 version is optional, front surface is IP65, backsize and driver is IP40;
- IP65 test report, IK07 test report, clean room test report is available;
- Best uniform light distribution;
- PMMA LGP anti yellowing;
- 5 years warranty;
- RA90 and RA80 optional;
- SDCM<6, SDCM<3 optional;

Accessories



Suspension kits



Recessed clips




Surfacemount frame




Specification

Name	Model.No.	Size	Wattage	Luminous flux	Efficiency	IP Rated	UGR	CCT
IP65 LED Edge Light Panel	DWIP606036/30B/26H	595x595x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	IP54/IP65	22	3000K/ 4000K/ 5700K
	DWIP606040B/36H	595x595x10mm	40W	5000lm	125lm/W 140lm/W	IP54/IP65	22	
	DWIP626236/30B/26H	620x620x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	IP54/IP65	22	
	DWIP3012036/30B/26H	295x1195x10mm	36W 30W 26W	3600lm	100lm/W 120lm/W 140lm/W	IP54/IP65	22	
	DWIP601206/48B/42H	595x1195x10mm	60W 48W 42W	6000lm 5760lm 5880lm	100lm/W 120lm/W 140lm/W	IP54/IP65	22	

*Customerized size available; DWP606036CCT : this is for CCT selected version. If RA90, the efficiency will be relatively lower.



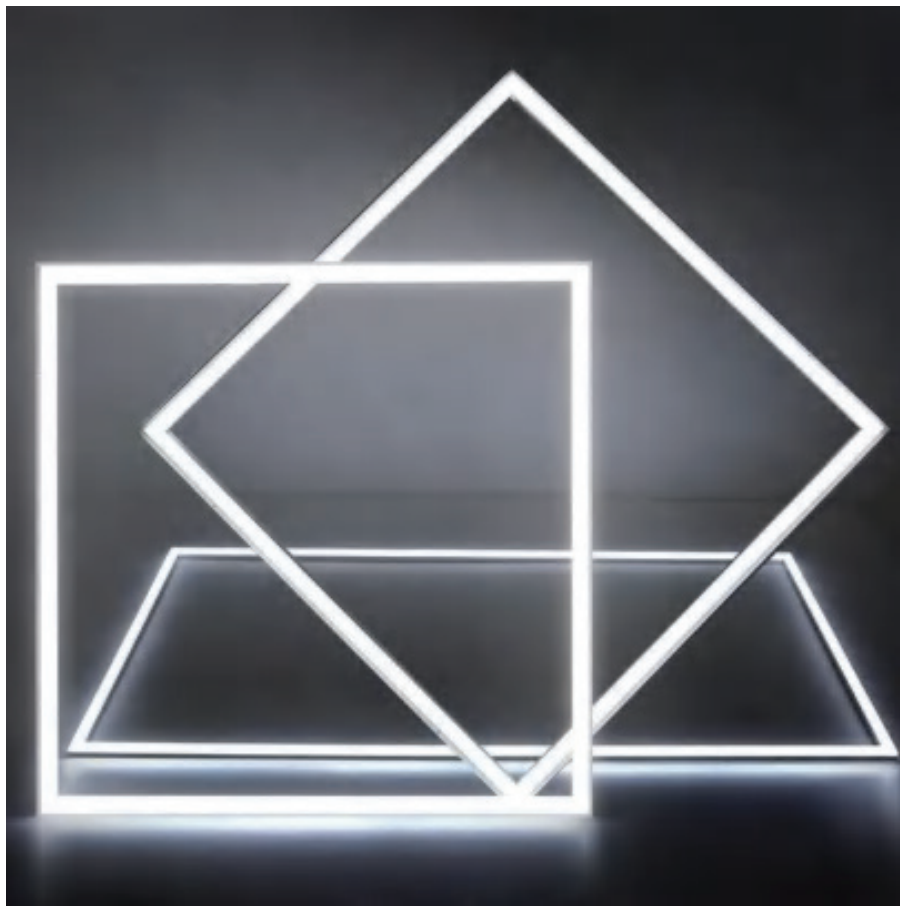

DECO Line Frame Panel

Features

- EDGE ILLUMINATION;
- Experience a bright living room, office, lobby, with high brightness;
- DROP IN INSTALLATION - Easy simple installation, no expertise required. Simply plug the driver in to the electric supply;
- UNIQUE LIGHTING - Watch your guests enjoy your new lighting design with something that is not seen everyday;
- Frame panels can be put together into a variety of fashionable shapes;
- The frame lamp would not affect the overall decorative effect of the ceiling;
- Zigbee driver optional;



Specification

DECO line frame panel Single CCT


Model.No.	Size	Wattage	Luminous flux	Efficiency	IP Rated	CCT	Beam Angle
DWP606036	595x595x10mm	36W	3600lm	100lm/W	IP20	3000K/ 4000K/ 5700K	120°
DWP626236	620x620x10mm	36W	3600lm	100lm/W	IP20		
DWP3012036	295x1195x10mm	36W	3600lm	100lm/W	IP20		
DWP6012036	595x1195x10mm	55W	5500lm	100lm/W	IP20		


DECO line frame panel CCT selected/CCT tunable

Model.No.	Size	Wattage	Luminous flux	Efficiency	IP Rated	CCT	Beam Angle
DWP606036CCT	595x595x10mm	36W	4320lm	120lm/W@4000K	IP20	3000K/ 4000K/ 5700K selected	120°
DWP626236CCT	620x620x10mm	36W	4320lm	120lm/W@4000K	IP20		
DWP3012036CCT	295x1195x10mm	36W	4320lm	120lm/W@4000K	IP20		
DWP6012036CCT	595x1195x10mm	55W	6600lm	120lm/W@4000K	IP20		

DECO line frame panel RGBW

Model.No.	Size	Wattage	Luminous flux	Efficiency	IP Rated	CCT	Beam Angle
DWP606036RGBW	595x595x10mm	36W	2600lm	70lm/W@4000K	IP20	3000K/ 4000K/ 5700K selected	120°
DWP626236RGBW	620x620x10mm	36W	2600lm	70lm/W@4000K	IP20		
DWP3012036RGBW	295x1195x10mm	36W	2600lm	70lm/W@4000K	IP20		
DWP6012036RGBW	595x1195x10mm	55W	3850lm	70lm/W@4000K	IP20		



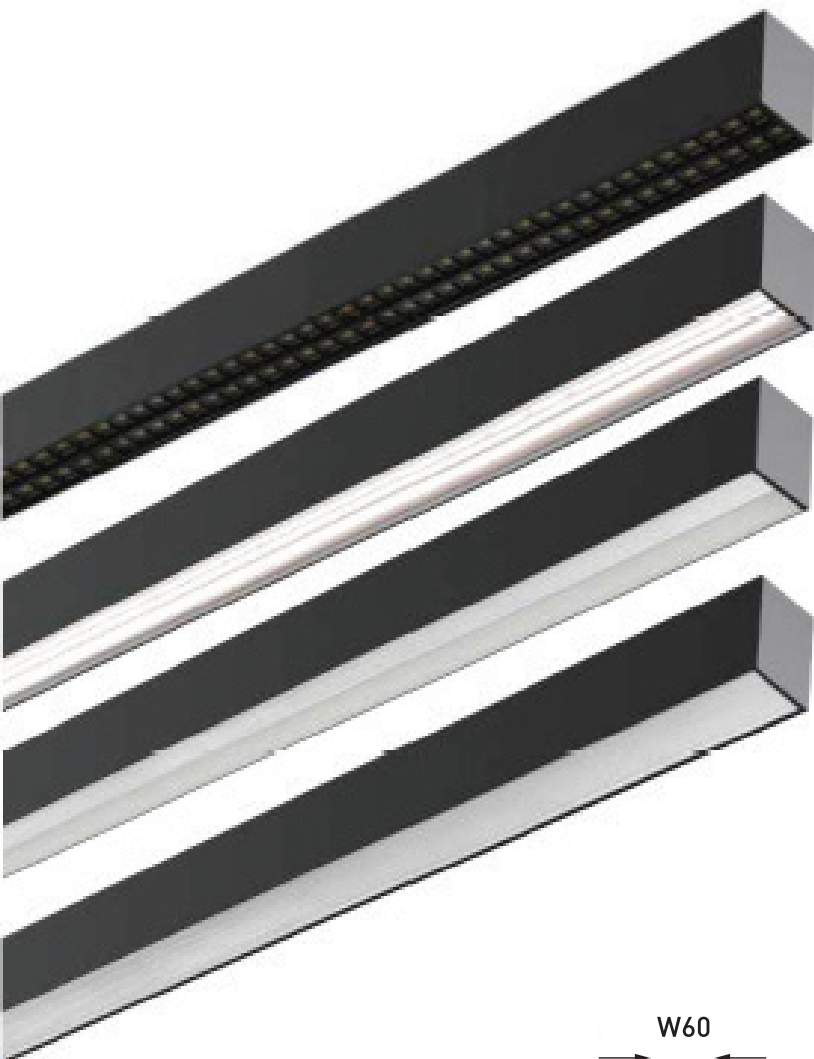

Reflector

ASY 35° LENS

Deep MP diffuser

Flat MP diffuser



Removable LED Gear




Tool free connection



CCT & Power selected



Plug & Play
uplight module

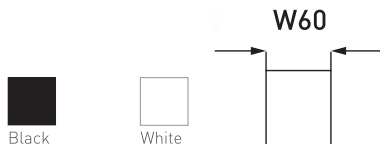


L60 Linear Light (Continuous Line)


Features:

- Designed for a continuous line of light;
- Tool free lock system for continuous light line;
- 36W 120lm/W using Philips LEDs;
- Plug & Play up light module;
- Suspended option, Surface mount, option;
- No light leaking for continuous light line;
- PIR sensor and Emergency options available;
- Profile size is 600mm, 900mm, 1200mm, 1500mm;
- Keep stock lowest and choice flexible;


Installation:




Suspended



Surface
mount



Frameless
recessed

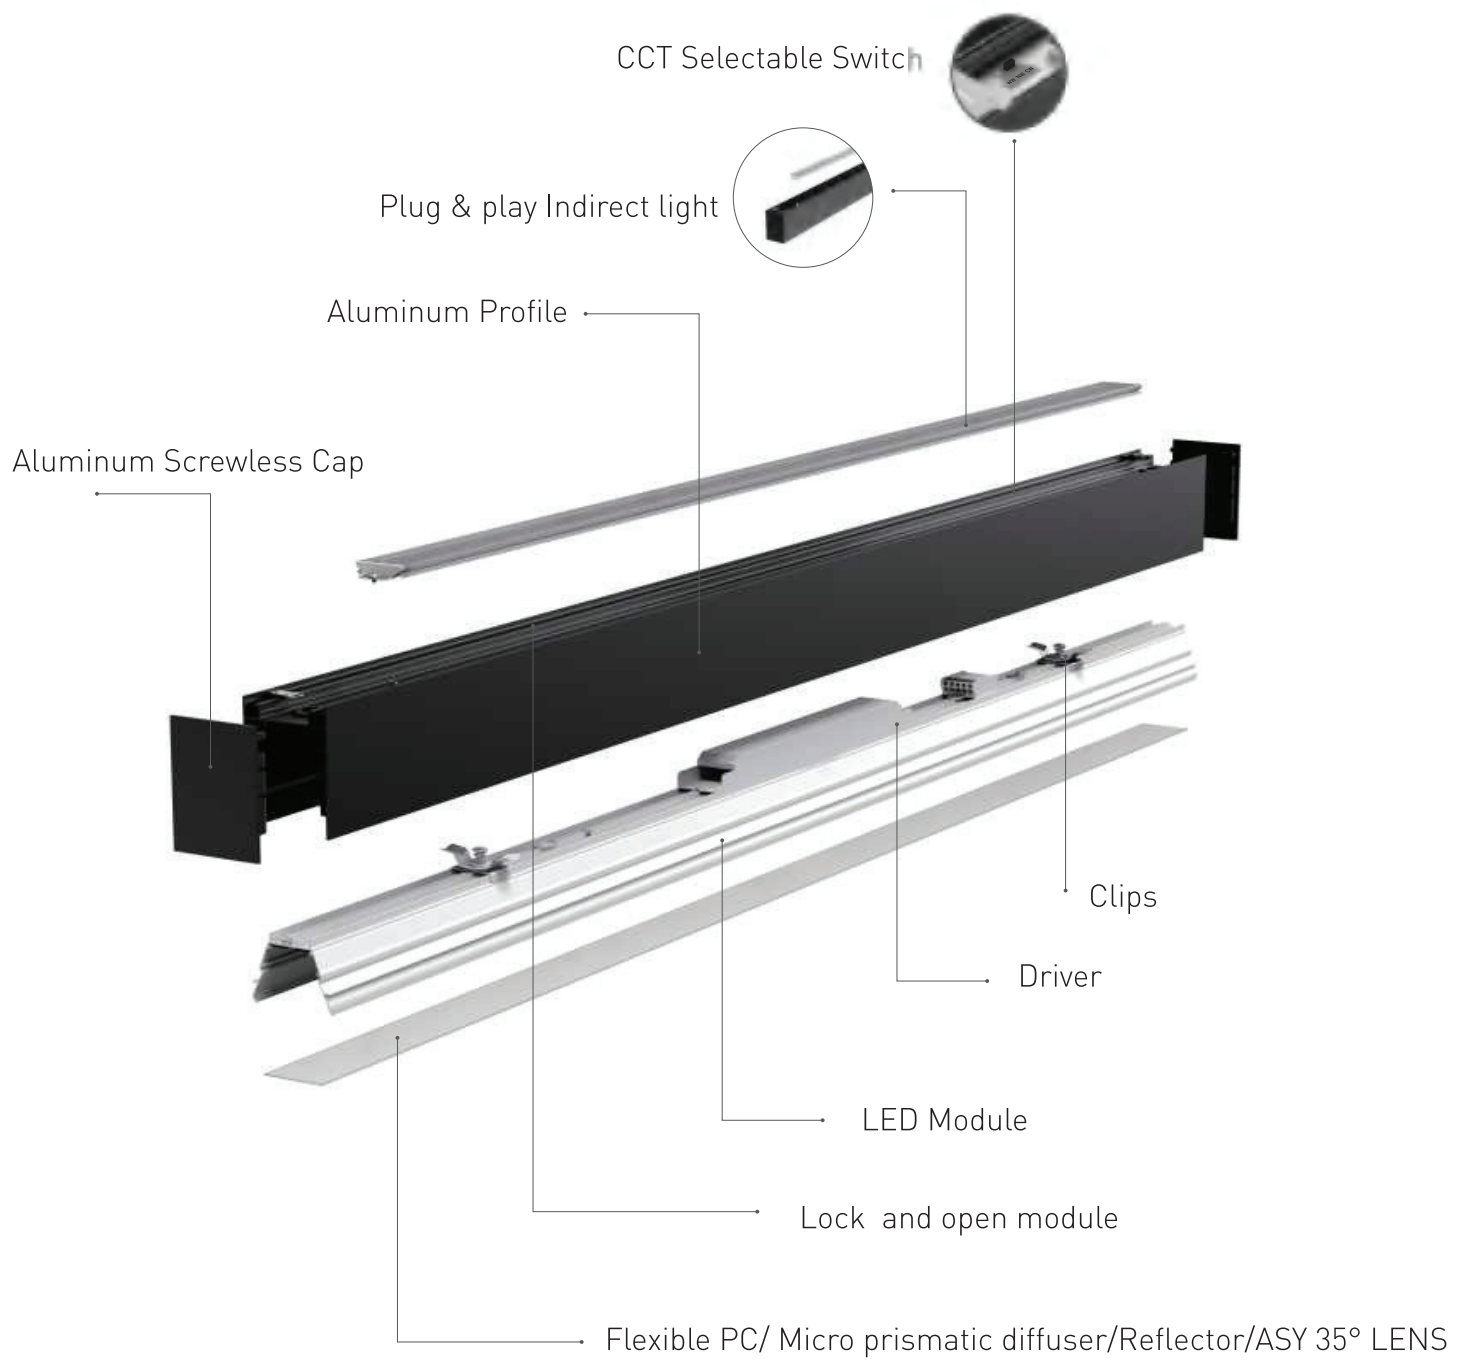



OPAL Diffuser

GLASS Diffuser


LENS




IP65 Linear light

- Linkable by IP65 connectors ;
- Suspending and surface mount installation Diecasting cap ;
- It is used in the high humidity hall;
- Zigbee driver optional;
- Buletooth and Wifi contorl supported by Tuya

Installation



Suspended



Surface
mount

Installation Accessory



Suspending kit
DWLGR5S



Surface mount kit
DWLGR5C



Joint cable



IP65 AC cable



Specification

High efficiency Zhaga panel light Single CCT

Model No.	Efficiency	LED Power	Luminous flux	Dimension	IP Rate	CCT	Beam angle	CRI	UGR	Remark
DWLGIP60218	120lm/w	18W	2160lm	650x65x85mm	65	3000K 4000K 5700K	110°	CRI80	<15 if whole panel	Opal/ Glass diffuser
DWLGIP60327	120lm/w	27W	3240lm	900x65x85mm						
DWLGIP60436	120lm/w	36W	4320lm	1200x65x85mm						
DWLGIP60545	120lm/w	45W	5400lm	1500x65x85mm						
DWLGIP60860	120lm/w	60W	7200lm	2400x65x85mm						
DWLWIP60218	100lm/w	18W	1800lm	650x65x85mm	65	3000K 4000K 5700K	ASY 35			ASY LENS wall wash
DWLWIP60327	100lm/w	27W	2700lm	900x65x85mm						
DWLWIP60436	100lm/w	36W	3600lm	1200x65x85mm						
DWLWIP60545	100lm/w	45W	4500lm	1500x65x85mm						
DWLWIP60860	100lm/w	60W	6000lm	2400x65x85mm						



KVIT

Premium Building Finishes



Ceramic Tiles



Porcelain Tiles



Sanitary Ware



Electric Water Heaters




Plastic & Acrylic



Mixers / Resale

KVIT

Pipelines

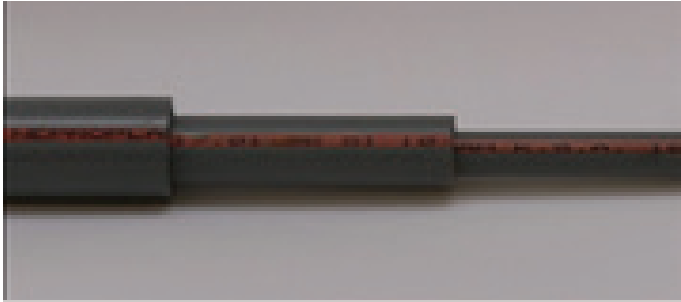

CPVC

Material: CPVC (FlowGuard™ TempRite).

Key Standards: ASTM F-441, NSF/ANSI 61, ISO 9001.

Main Applications: Hot & cold potable water.

Key Features: High chemical resistance, corrosion-proof, safe for drinking water, long lifespan.



HDPE

Material: High-Density Polyethylene (PE32-PE100).

Key Standards: SASO ISO 4427-2.

Main Applications: Water, gas, telecom, electrical, COD for fiber optics.

Key Features: Lightweight, flexible, UV & chemical resistant, weldable, 50+ year lifespan.



PVC

Material: Unplasticized PVC.

Key Standards: BS 3505/3506, ISO 1452, ASTM D1785, SASO.

Main Applications: Potable water, sewer, conduit.

Key Features: Corrosion & chemical resistant, smooth bore, lightweight, durable.



PVC SCH 40 & 80

Material: PVC.

Key Standards: ASTM D1785.

Main Applications: Water, drainage, industrial.

Key Features: Pressure-rated, versatile, durable, low maintenance.



COD

Material: HDPE.

Key Standards: Telecom specifications.

Main Applications: Fiber optic & electrical cable protection.

Key Features: Flexible, impact-resistant, protects sensitive cables.



uPVC Casing & Screen

Material: uPVC.

Key Standards: BS, ASTM, SASO.

Main Applications: Wells, boreholes, filtration.

Key Features: Precision fit, strong, environmental durability.